

4147CTK BRENTWOOD®



Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet Kit

FEATURES

- Complete toilet kit (CTK)
- Concealed trapway for easier cleaning
- 1.6 gpf / 6.0 lpf low water consumption
- Elongated front, SmartHeight™ bowl
- Complies with ADA requirements for accessibility
- High performance MagnaFlush™ flushing technology
- 3" flush valve
- Pilot operated anti-siphon fill valve
- 12" rough-in
- Model 76 chrome-plated, metal trip lever
- 2" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White



MODEL 4147CTK			
Toilet seat included	ELONGATED	SMARTHEIGHT ADA	CTK
Complete toilet kit			

COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS
4147CTK	Elongated front, SmartHeight™ complete toilet kit. Includes: toilet seat, wax toilet ring, floor bolts, caps, and multi-lingual installation instructions. Water supply hardware not included.	 
4148	Elongated front, SmartHeight™ toilet bowl only. Less toilet seat and supply.	
3147	Tank and cover only, with left hand, chrome-plated, metal trip lever. Less supply.	
SB4148	Elongated, enclosed ring, slow close toilet seat	
TANK TRIM & REPLACEMENT PARTS		
76	Trip lever - chrome-plated, metal trip lever, left hand	
2206	Pilot operated fill valve	
630-0207	Replacement flapper	
3147-LID	Tank lid	

4147CTK BRENTWOOD®



Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet Kit

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
4147CTK	Elongated front, SmartHeight™ (1.6gpf/6.0 lpf) two-piece toilet kit	 

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3' MagnaFlush™ flushing technology
WATER USAGE	1.6 gpf / 6.0 lpf
WATER SURFACE AREA	7' X 9-1/4'
ROUGH-IN	12"
MAP RATING	800 grams

TRAP DIAMETER	2-1/4'
TRAP SEAL	2-1/2'
SHIPPING WEIGHT	Model 4147CTK- 94 lbs. (43 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

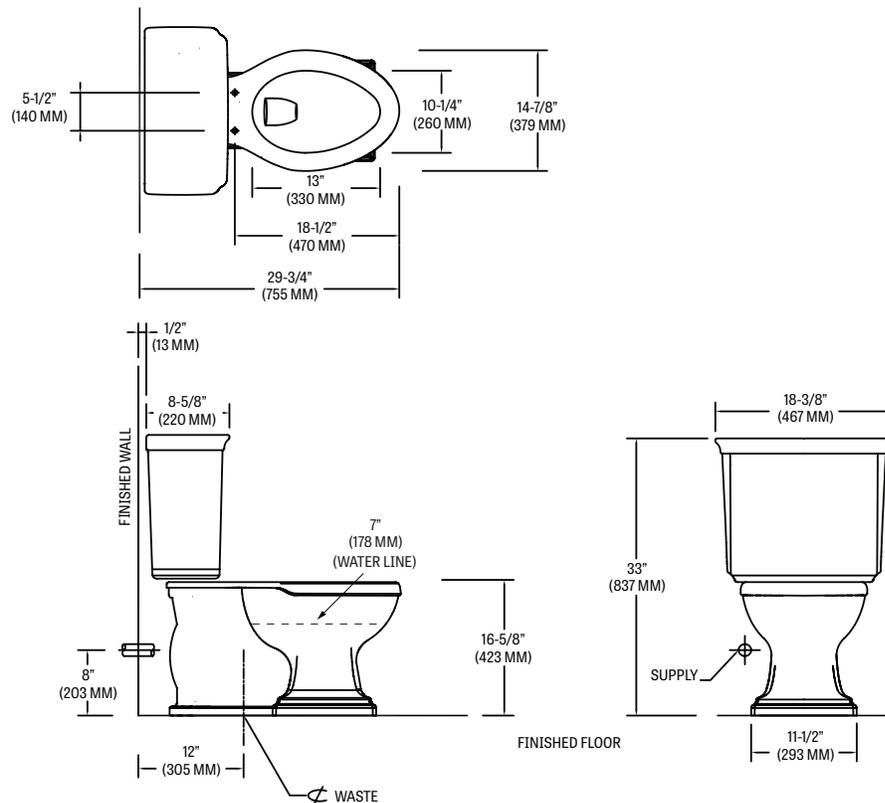

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.